

AV ENHANCER/STEREO MIXER

MODEL: AVM-50E

NEW

Convenient + Efficient



The simple and easy way to enhance the video image of every home video while adding exciting soundtrack mix of narration and background music at the same time.


Features:

- **VIDEO ENHANCER:**
Video enhancer boosts video signal to restore washed out colors.
- **STEREO SOUND MIXER:**
Add narration and background music in stereo to your home video tapes. Stereo sound is added to the transferred tape. Original tape is not affected.
- **HEADPHONE:**
Headphone to check audio's level.
Easy to control.

Specifications:

Audio	Input Level	Audio	150mv
		Music	150mv
		Microphone	1mv
	Input Impedance	Audio	47K Ω
		Music	47K Ω
		Microphone	600 Ω
Gain	10 dB nom.		
Frequency Response	20Hz–20KHz+/-3dB		
Output Impedance	47K Ω		
Video	Input Level	1V P–P	
	Gain	6 dB nom.	
	Frequency Response	0.5MHz=6MHz+/-1.5dB	
	Input Impedance	75 Ω	
	Output Impedance	75 Ω	
Headphone	Audio Frequency Response	100Hz–20KHz+/-3dB	
	Headphone output Impedance	32 Ω	
AC Input	AC100V \pm 10%/AC 220V \pm 10% (Adaptor)		
DC Input	12V \pm 10%		
Dimension	202 \times 120 \times 45 (mm)		
Weight	Approx. 0.51Kgs		
Packing	20pcs/2.5'		

Connection:

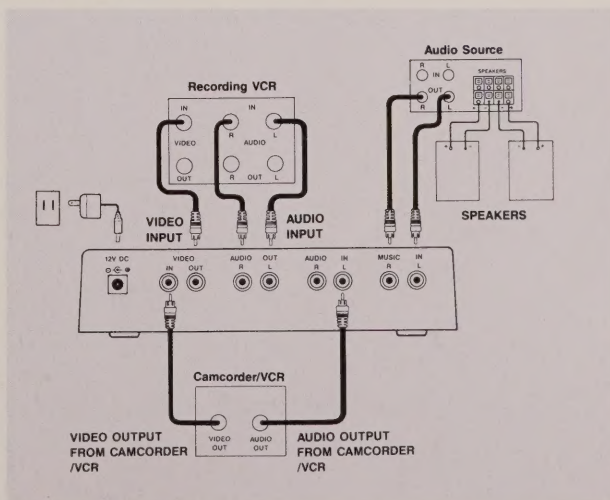

AV SELECTOR/COMMANDER

Model AV-41 AUDIO (Stereo L+R) VIDEO 4 WAY SELECTOR



4 Input 1 Output

Model AV-42 Amplified AUDIO (Stereo L+R) & VIDEO 4 WAY COMMANDER



4 Input 2 Output

Features: AV-41

- Allow you to select any 4 combinations of AV equipments by easily switching to your TV/Monitor and Hi-Fi system.
- Baseband design for reducing RF interference.
- Instant one-touch push-button switching.
- Stereo compatible.
- Compact and decorated appearance.


Features: AV-42

- Allow you to select any 4 combinations of AV equipments by easily switching and commanding to your TV/Monitor, Stereo VCR and Hi-Fi system.
- 4 set Video/Audio (L+R) input & 2 set Video/Audio (L+R) output.
- Baseband design for reducing RF interference.
- Instant one-touch push-button for separate control.
- High-Tech circuit design with approved AC adaptor
- Compact and decorated appearance.


For Home Satellites, VCRS, Laser Discs, Camcorder, TV Games, CD player and All Hi-Fi AV Devices, Combining Switching and Commanding.

Connection:

AV-41

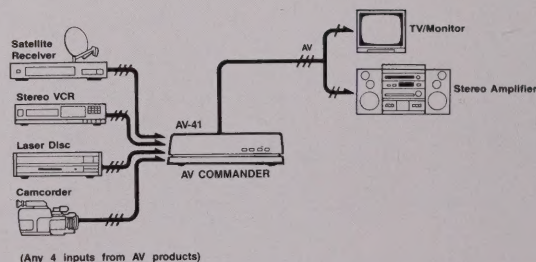

AV-42

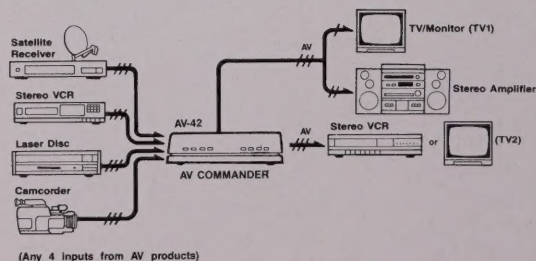

Items		Model: AV-41		Model: AV-42	
		Video	Audio	Video	Audio
Input	RCA Connector	4	Rx4, Lx4	4	Rx4, Lx4
	Impedance	75 ohm	47K ohm	75 ohm	47K ohm
	Level	1V P-P	0.4V	1V P-P	0.4V
Output	RCA Connector	1	Rx1, Lx1	2	Rx2, Lx2
	Impedance	75 ohm	47K ohm	75 ohm	47K ohm
	Level	1V P-P ±10%	0.35V ±20%	1V P-P ±10%	0.35V ±20%
AC Input		—		AC 100V ±10%/AC 220 ±10% (Adaptor)	
DC Input		—		18V ±10%	
Dimension		180×145×50 (mm)		180×145×50 (mm)	
Weight		Approx. 0.56kgs		Approx. 0.75kgs	
Packing		20pcs/1.6'		20pcs/2.3'	